



# K-SPV EINFACH

Check valves, single-acting - spring to close

**HANSA FLEX**

## Properties

<b>Operating pressure</b>	Max. 10 bar
<b>Pilot pressure</b>	min. 3.0 bar, max. 8 bar with double-acting actuator; min. 4.2 bar, max. 8 bar for single-drive
<b>Temperature</b>	-20 °C to +80 °C (NBR); -20 °C to +150 °C (FKM)
<b>Connection</b>	NAMUR-Interface, direct: 2 x G 1/8
<b>Installation position</b>	Any
<b>Housing, internal parts</b>	Nickel-plated brass
<b>Spring</b>	Stainless-steel
<b>Sealant</b>	Perbunan (NBR) or FKM (FPM)

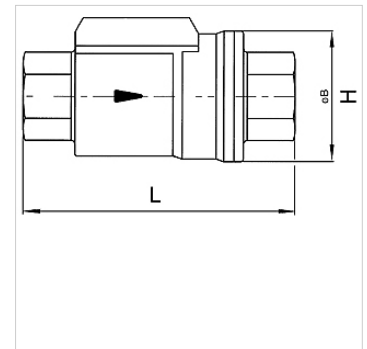

## Note

Further information on request

## Description

2/2-way check valves, specially designed for automated industrial plant engineering. A low-price, compact, space-saving and reliable alternative to ball valves with a pneumatic rotary actuator. <br>These valves have a full bore.

Item					
Identification	DN	Thread	Sealant	H (mm)	L (mm)
K- 07 30 25 45	10	Rp 3/8	NBR	46,0	98,0
K- 07 30 25 46	15	Rp 1/2	NBR	51,7	112,0
K- 07 30 25 47	20	Rp 3/4	NBR	63,5	135,0
K- 07 30 25 48	25	Rp 1	NBR	69,0	143,0
K- 07 30 25 49	10	Rp 3/8	FKM	46,0	98,0
K- 07 30 25 50	15	Rp 1/2	FKM	51,7	112,0
K- 07 30 25 51	20	Rp 3/4	FKM	63,5	135,0
K- 07 30 25 52	25	Rp 1	FKM	69,0	143,0