

K-K VERTEILER

X-distributors, 4 x female, Rp thread acc. to ISO 7-1

HANSA FLEX


Properties

Operating pressure Max. 20 bar

Operating temperature Max. 175 °C

Female thread Rp-thread acc. ISO 7-1

Material Stainless steel 1.4401 / 1.4408

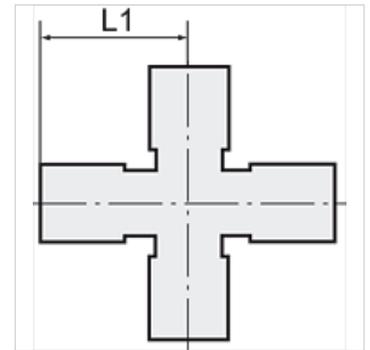

Note

Further information on request

Item

Identification	Thread	L1 (mm)
K- 07 40 10 48	Rp 1/8	19,0
K- 07 40 10 49	Rp 1/4	19,0
K- 07 40 10 50	Rp 3/8	23,0
K- 07 40 10 51	Rp 1/2	27,0
K- 07 40 10 52	Rp 3/4	32,0
K- 07 40 10 53	Rp 1	38,0