

K-W45 STUECK IG IG RP-GEW

45° elbows, female-female, Rp thread acc. to ISO 7-1

HANSA FLEX


Properties

Operating pressure Max. 20 bar

Operating temperature Max. 175 °C

Female thread Rp-thread acc. ISO 7-1

Material Stainless steel 1.4401 / 1.4408

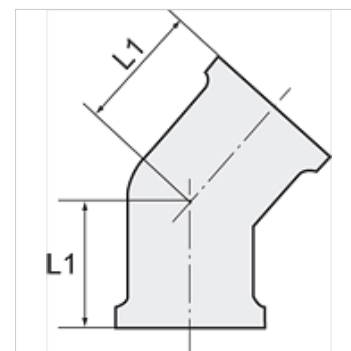

Note

Further information on request

Item

Identification	Thread	L1 (mm)
K- 07 40 10 42	Rp 1/8	15,6
K- 07 40 10 43	Rp 1/4	15,9
K- 07 40 10 44	Rp 3/8	17,6
K- 07 40 10 45	Rp 1/2	19,2
K- 07 40 10 46	Rp 3/4	22,8
K- 07 40 10 47	Rp 1	26,7