


K-W90 STUECK IG AG RP-GEW

90° elbows, female-male, female thread: Rp thread acc. to ISO 7-1,
male thread: R thread acc. to ISO 7-1

HANSA **FLEX**

Properties

| | |
|-----------------------|---------------------------------|
| Operating pressure | Max. 20 bar |
| Operating temperature | Max. 175 °C |
| Female thread | Rp-thread acc. ISO 7-1 |
| Material | Stainless steel 1.4401 / 1.4408 |
| Male thread | R-thread acc. ISO 7-1 |

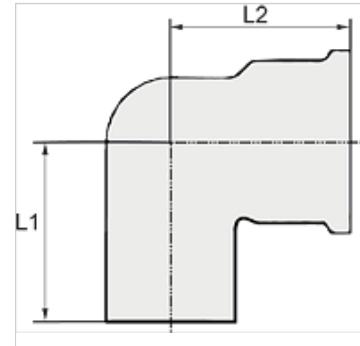

Note

Further information on request

Item

| Identification | Thread | L1 (mm) | L2 (mm) |
|----------------|---------------------------|------------|------------|
| K-07 40 10 33 | Rp 1/8 female, R 1/8 male | 24,0 | 17,0 |
| K-07 40 10 34 | Rp 1/4 female, R 1/4 male | 28,0 | 20,0 |
| K-07 40 10 35 | Rp 3/8 female, R 3/8 male | 32,0 | 22,0 |
| K-07 40 10 36 | Rp 1/2 female, R 1/2 male | 38,0 | 27,0 |
| K-07 40 10 37 | Rp 3/4 female, R 3/4 male | 45,0 | 32,0 |
| K-07 40 10 38 | Rp 1 female, R 1 male | 52,0 | 37,0 |