
K-W90 STUECK IG AG RP-GEW

90° elbows, female-male, female thread: Rp thread acc. to ISO 7-1, male thread: R thread acc. to ISO 7-1

Properties

Operating pressure	Max. 20 bar
Operating temperature	Max. 175 °C
Female thread	Rp-thread acc. ISO 7-1
Material	Stainless steel 1.4401 / 1.4408
Male thread	R-thread acc. ISO 7-1



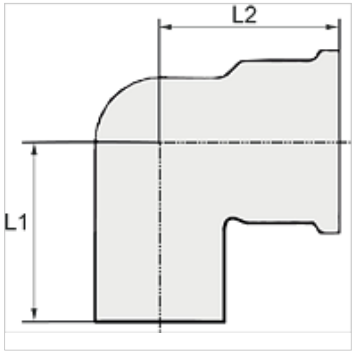

Note

Further information on request

Item

Identification	Thread	L1 (mm)	L2 (mm)
K- 07 40 10 33	Rp 1/8 female, R 1/8 male	24,0	17,0
K- 07 40 10 34	Rp 1/4 female, R 1/4 male	28,0	20,0
K- 07 40 10 35	Rp 3/8 female, R 3/8 male	32,0	22,0
K- 07 40 10 36	Rp 1/2 female, R 1/2 male	38,0	27,0
K- 07 40 10 37	Rp 3/4 female, R 3/4 male	45,0	32,0
K- 07 40 10 38	Rp 1 female, R 1 male	52,0	37,0

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.