

K-W90 STUECK AG IG 2 2

Elbows, male-female

HANSA FLEX

Properties



Operating pressure 60 bar

Operating temperature Max. 150 °C

Female thread Parallel to DIN EN ISO 228-1

Material Brass with a bare metal surface

Male thread conical acc. DIN 2999

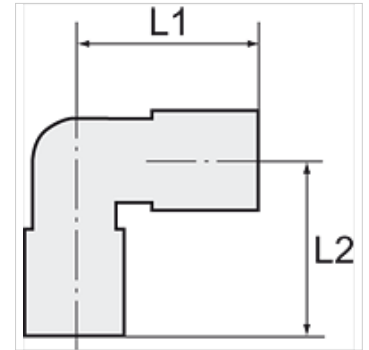

Note

Further information on request

Item

Identification	Thread	L1 (mm)	L2 (mm)	AF
K- 07 40 11 32	G/R 1/8	18,5	21,0	10 mm
K- 07 40 11 33	G/R 1/4	23,5	25,5	13 mm
K- 07 40 11 34	G/R 3/8	26,0	28,0	17 mm
K- 07 40 11 35	G/R 1/2	31,0	33,5	21 mm
K- 07 40 11 36	G/R 3/4	33,0	36,5	25 mm
K- 07 40 11 37	G/R 1	39,0	45,0	30 mm