

# K-T-STUECKE IG AG IG 2

Tees, female-male-female

## Properties

| | |
|---|---|
| **Operating pressure** | 60 bar |
| **Operating temperature** | Max. 150 °C |
| **Female thread** | Parallel to DIN EN ISO 228-1 |
| **Material** | Nickel-plated brass |
| **Male thread** | conical acc. DIN 2999 |



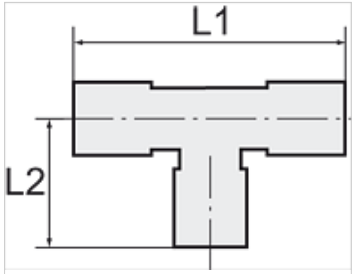


## Note

Further information on request

## Item

| Identification | Thread | L1 (mm) | L2 (mm) | AF |
|---|---|---|---|---|
| **K- 07 40 48 93** | M 5 | 22,0 | 11,5 | 9 mm |
| **K- 07 40 11 08** | G/R 1/8 | 42,0 | 18,5 | 10 mm |
| **K- 07 40 11 09** | G/R 1/4 | 51,0 | 23,5 | 13 mm |
| **K- 07 40 11 10** | G/R 3/8 | 56,0 | 26,0 | 17 mm |
| **K- 07 40 11 11** | G/R 1/2 | 67,0 | 31,0 | 21 mm |
| **K- 07 40 11 12** | G/R 3/4 | 73,0 | 33,0 | 25 mm |
| **K- 07 40 11 13** | G/R 1 | 90,0 | 39,0 | 30 mm |

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*