

K-T-STUECKE IG IG AG 2

Tees, female-female-male

Properties

Operating pressure	60 bar
Operating temperature	Max. 150 °C
Female thread	Parallel to DIN EN ISO 228-1
Material	Nickel-plated brass
Male thread	conical acc. DIN 2999



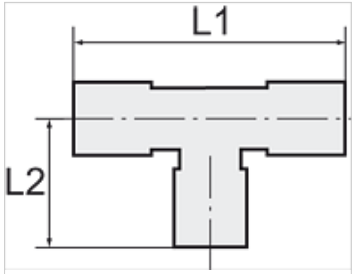

Note

Further information on request

Item

Identification	Thread	L1 (mm)	L2 (mm)	AF
K- 07 40 48 94	M 5	22,5	11,0	9 mm
K- 07 40 11 16	G/R 1/8	39,5	21,0	10 mm
K- 07 40 11 17	G/R 1/4	49,0	23,5	13 mm
K- 07 40 11 18	G/R 3/8	54,0	28,0	17 mm
K- 07 40 11 19	G/R 1/2	64,5	33,5	21 mm
K- 07 40 11 20	G/R 3/4	69,5	36,5	25 mm
K- 07 40 11 21	G/R 1	84,0	45,0	30 mm

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.