
K-XV 6-KANT


Double nipples, hexagonal

HANSA-FLEX

Properties

Working pressure	Max. 20 bar
Male thread	Parallel to DIN EN ISO 228-1
Material	Stainless steel 1.4408

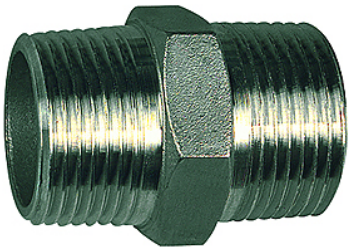

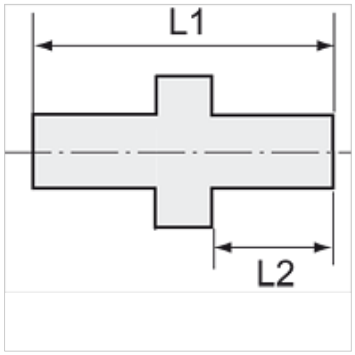

Note

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.
Further information on request

Item

Identification	Thread	L1 (mm)	L2 (mm)	AF
K- 07 40 12 18	G 1/8	30,0	12,0	13 mm
K- 07 40 12 19	G 1/4	32,0	13,0	16 mm
K- 07 40 12 20	G 3/8	34,0	13,0	20 mm
K- 07 40 12 21	G 1/2	37,5	15,0	24 mm
K- 07 40 12 22	G 3/4	46,0	18,0	29 mm
K- 07 40 12 23	G 1	51,0	19,0	35 mm
K- 07 40 12 24	G 1 1/4	57,0	22,0	46 mm
K- 07 40 12 25	G 1 1/2	58,0	23,0	51 mm
K- 07 40 12 26	G 2	66,9	26,0	63 mm

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.