


# K-XG LOESBAR IG IG KONISCHDICH

Detachable double nipples, female, taper seat

**HANSA FLEX**

## Properties

<b>Working pressure</b>	Max. 10 bar
<b>Male thread</b>	Parallel to DIN EN ISO 228-1
<b>Female thread</b>	Parallel to DIN EN ISO 228-1
<b>Material</b>	Stainless steel 1.4408

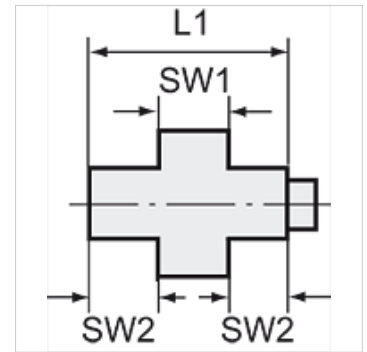

## Note

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes. Further information on request

## Item

Identification	Thread	L1 (mm)	AF1 (mm)	AF2 (mm)
K- 07 40 12 42	G 1/8	32,3	29	18
K- 07 40 12 43	G 1/4	32,4	29	18
K- 07 40 12 44	G 3/8	34,7	34	22
K- 07 40 12 45	G 1/2	40,0	39	26
K- 07 40 12 46	G 3/4	42,0	47	32
K- 07 40 12 47	G 1	48,7	58	40
K- 07 40 12 48	G 1 1/4	54,0	67	49
K- 07 40 12 49	G 1 1/2	58,9	76	56
K- 07 40 12 50	G 2	62,2	90	68