



K-XG LOESBAR IG AG 2

Detachable double nipples, female-male, taper seat

HANSA FLEX

Properties

| | |
|-------------------------|------------------------------|
| Working pressure | Max. 10 bar |
| Male thread | Parallel to DIN EN ISO 228-1 |
| Female thread | Parallel to DIN EN ISO 228-1 |
| Material | Stainless steel 1.4408 |

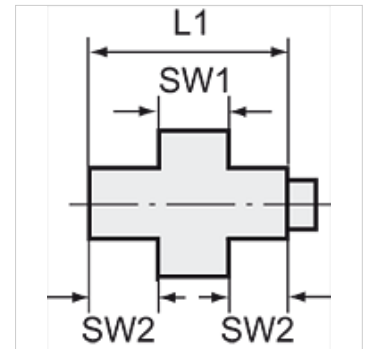

Note

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.
Further information on request

Item

| Identification | Thread | L1 (mm) | AF1 (mm) | AF2 (mm) |
|----------------|---------|------------|-------------|-------------|
| K- 07 40 12 51 | G 1/8 | 42,3 | 29 | 18 |
| K- 07 40 12 52 | G 1/4 | 43,0 | 29 | 18 |
| K- 07 40 12 53 | G 3/8 | 46,0 | 34 | 22 |
| K- 07 40 12 54 | G 1/2 | 56,0 | 39 | 26 |
| K- 07 40 12 55 | G 3/4 | 59,7 | 47 | 32 |
| K- 07 40 12 56 | G 1 | 67,0 | 58 | 40 |
| K- 07 40 12 57 | G 1 1/4 | 76,0 | 67 | 49 |
| K- 07 40 12 58 | G 1 1/2 | 81,0 | 76 | 56 |
| K- 07 40 12 59 | G 2 | 89,0 | 90 | 68 |