
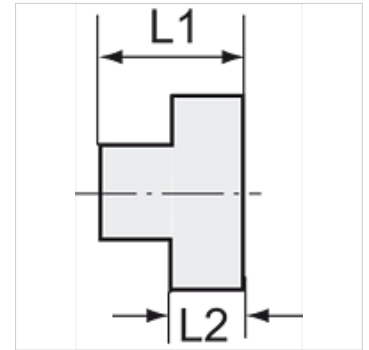


# K-VSTOK 4

Plugs, square

## Properties

|                         |                              |
|-------------------------|------------------------------|
| <b>Working pressure</b> | Max. 20 bar                  |
| <b>Male thread</b>      | Parallel to DIN EN ISO 228-1 |
| <b>Material</b>         | Stainless steel 1.4408       |



## Note

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes. Further information on request

## Item

| Identification | Thread  | L1<br>(mm) | L2<br>(mm) | AF    |
|----------------|---------|------------|------------|-------|
| K- 07 40 39 73 | G 1/8   | 13,9       | 7,0        | 6 mm  |
| K- 07 40 39 74 | G 1/4   | 19,4       | 11,2       | 9 mm  |
| K- 07 40 39 75 | G 3/8   | 17,8       | 10,0       | 10 mm |
| K- 07 40 39 76 | G 1/2   | 25,0       | 15,8       | 14 mm |
| K- 07 40 39 77 | G 3/4   | 28,0       | 17,0       | 17 mm |
| K- 07 40 39 78 | G 1     | 31,0       | 19,0       | 19 mm |
| K- 07 40 39 79 | G 1 1/4 | 35,0       | 21,9       | 23 mm |
| K- 07 40 39 80 | G 1 1/2 | 36,0       | 21,9       | 26 mm |
| K- 07 40 39 81 | G 2     | 40,4       | 25,4       | 32 mm |