
# K-VSTOK 6
Plugs, hexagonal

HANSA-FLEX

## Properties

| | |
|---|---|
| **Working pressure** | Max. 20 bar |
| **Male thread** | Parallel to DIN EN ISO 228-1 |
| **Material** | Stainless steel 1.4408 |



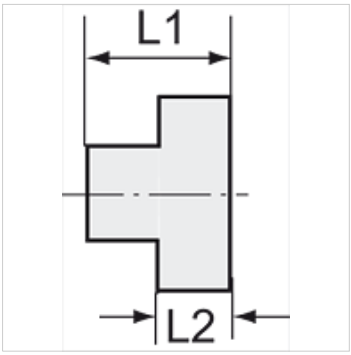


## Note

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.
Further information on request

## Item

| Identification | Thread | L1 (mm) | L2 (mm) | AF |
|---|---|---|---|---|
| **K- 07 40 39 82** | G 1/8 | 17,3 | 6,3 | 12 mm |
| **K- 07 40 39 83** | G 1/4 | 18,3 | 6,2 | 17 mm |
| **K- 07 40 39 84** | G 3/8 | 19,3 | 6,0 | 21 mm |
| **K- 07 40 39 85** | G 1/2 | 22,2 | 6,0 | 26 mm |
| **K- 07 40 39 86** | G 3/4 | 25,2 | 6,8 | 31 mm |
| **K- 07 40 39 87** | G 1 | 27,0 | 7,3 | 38 mm |
| **K- 07 40 39 88** | G 1 1/4 | 30,2 | 7,7 | 46 mm |
| **K- 07 40 39 89** | G 1 1/2 | 32,4 | 8,8 | 53 mm |
| **K- 07 40 39 90** | G 2 | 36,0 | 10,0 | 63 mm |

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*