# K-SCHALLDAE SINTERBR AG 560

Silencers, sintered bronze, flat type with male thread, 560 Series

## Properties

| | |
|---|---|
| **Operating pressure** | Max. 10 bar |
| **Operating temperature** | -10 °C to +250 °C |
| **Standard** | G thread acc. to DIN EN ISO 228-1 |



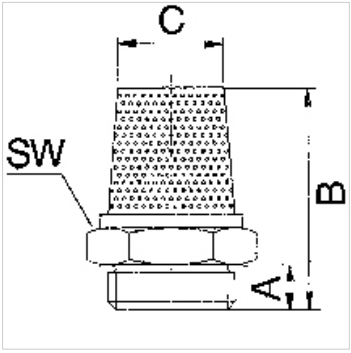


## Note

Further information on request

## Description

For reducing the exhaust noise generated by pneumatic equipment.

## Item

| Identification | Thread | B (mm) | C (mm) |
|---|---|---|---|
| **K- 07 40 34 87** | G 1/8 | 6,0 | 6,0 |
| **K- 07 40 34 88** | G 1/4 | 6,0 | 8,0 |
| **K- 07 40 34 89** | G 3/8 | 6,5 | 10,0 |
| **K- 07 40 34 90** | G 1/2 | 8,0 | 12,0 |
| **K- 07 40 34 91** | G 3/4 | 10,5 | 20,0 |
| **K- 07 40 34 92** | G 1 | 9,5 | 26,0 |

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*