
K-SCHALLDAEMPFER EINSTELLBAR

Sintered bronze silencers

Properties

Operating pressure	Max. 10 bar
Operating temperature	-10 °C to +250 °C



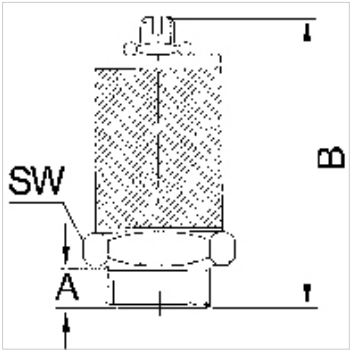

Note

Further information on request

Description

The volume of exhaust air can be set by means of an adjusting screw with a lock nut.

Item

Identification	Thread	A (mm)	B	AF
K- 07 40 34 59	M 5	4,0	21,0 - 28,0 mm	8 mm
K- 07 40 34 60	R 1/8	8,0	38,0 - 48,0 mm	16 mm
K- 07 40 34 61	R 1/4	9,5	39,5 - 49,5 mm	16 mm
K- 07 40 34 62	R 3/8	10,5	47,5 - 60,5 mm	22 mm
K- 07 40 34 63	R 1/2	12,0	49,0 - 62,0 mm	22 mm
K- 07 40 46 84	R 3/4	12,0	75,4 - 90,0 mm	30 mm
K- 07 40 46 85	R 1	14,5	75,9 - 90,5 mm	36 mm

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.