


Properties

Operating pressure	Max. 10 bar
Temp. range	-20 °C to +80 °C

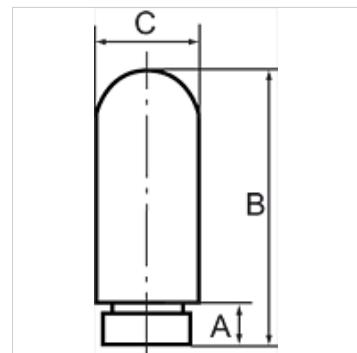

Note

Important: The air flowing through the silencer is cooled down. at temperatures below zero, the moisture in the air can freeze, causing the pores of the silencer to close up.

Further information on request

Item

Identification	Thread	A (mm)	B (mm)	C (mm)
K-07 40 46 90	M 5	5,0	25,0	7,0
K-07 40 40 61	G 1/8	7,0	32,0	13,0
K-07 40 40 62	G 1/4	8,0	39,0	17,0
K-07 40 40 63	G 3/8	11,0	65,0	25,0
K-07 40 40 64	G 1/2	11,5	70,0	25,0
K-07 40 40 65	G 3/4	15,5	138,0	37,0
K-07 40 40 66	G 1	19,5	158,0	48,0