

K-T-TUE
Tee hose connectors

Properties

Operating pressure	Dependent on operating temperature; Max. 10 bar (at 20 °C); Max. 1 bar (at 60 °C)
Threaded connection body	Polyamide (PA)
Clamp ring	Polypropylene (PP)
Nut	Polypropylene (PP)



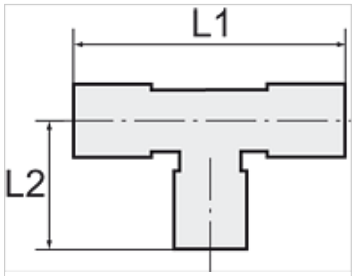

Note
Further information on request

Description
Manufactured from high impact-resistant, UV-stabilised engineering plastic, extremely resistant to weathering. Good chemical resistance to benzine, diesel oil, fuel oil and alkalis.
Not suitable for use with acids.

Item

Identification	for hose	L1 (mm)	L2 (mm)
K- 07 40 32 70	4 mm / 6 mm	52,0	26,0
K- 07 40 32 71	6 mm / 8 mm	62,0	31,0
K- 07 40 32 72	8 mm / 10 mm	72,0	36,0
K- 07 40 32 73	9 mm / 12 mm	80,0	40,0

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.