


**Properties**

<b>Operating pressure</b>	Dependent on operating temperature; Max. 10 bar (at 20 °C); Max. 1 bar (at 60 °C)
<b>Threaded connection body</b>	Polyamide (PA)
<b>Clamp ring</b>	Polypropylene (PP)
<b>Nut</b>	Polypropylene (PP)

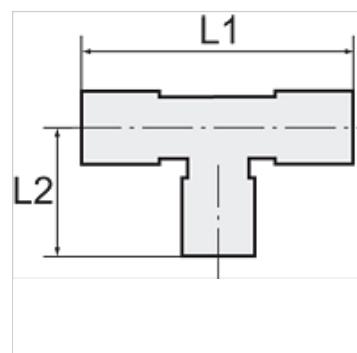

**Note**

Further information on request

**Description**

Manufactured from high impact-resistant, UV-stabilised engineering plastic, extremely resistant to weathering. Good chemical resistance to benzine, diesel oil, fuel oil and alkalis. <br>Not suitable for use with acids.

**Item**

Identification	for hose	L1 (mm)	L2 (mm)
<b>K-07 40 32 70</b>	4 mm / 6 mm	52,0	26,0
<b>K-07 40 32 71</b>	6 mm / 8 mm	62,0	31,0
<b>K-07 40 32 72</b>	8 mm / 10 mm	72,0	36,0
<b>K-07 40 32 73</b>	9 mm / 12 mm	80,0	40,0