


# K-T-VB MS NI VALUE LINE

Union tees

**HANSA FLEX**

## Properties

<b>Operating pressure</b>	Max. 16 bar (at +20 °C)
<b>Operating temperature</b>	-20 °C to +70 °C
<b>Material</b>	Nickel-plated brass
<b>Contact pressure ring</b>	Hostaform (black nickel-plated for Ø 10, 12)
<b>O-ring</b>	NBR, siliconefree
<b>Collet</b>	Stainless steel AISI 316

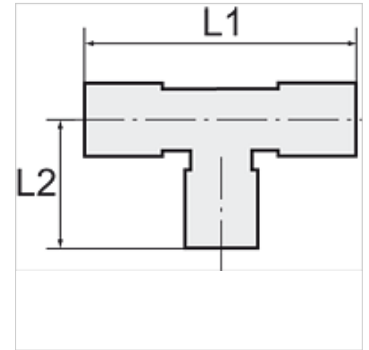

## Note

Further information on request

## Description

Economy yet very high-quality series of push-in fittings made of nickel-plated brass. Compact, space-saving, lightweight design. An O-ring in the fillet at the end of the thread guarantees a tight connection for all male thread parts, even on rough surfaces.

## Item

Identification	for external hose Ø	L1 (mm)	L2 (mm)
K- 07 40 29 52	4 mm	17,5	17,5
K- 07 40 29 53	6 mm	19,5	19,5
K- 07 40 29 54	8 mm	23,0	23,0
K- 07 40 29 55	10 mm	25,0	25,0
K- 07 40 29 56	12 mm	27,0	27,0