



K-XVM ZYL OR 1

Male connectors, parallel male thread with O-ring

HANSA FLEX

Properties

Working pressure	Max. 18 bar
Sealant	Buna-N
Material	Nickel-plated brass

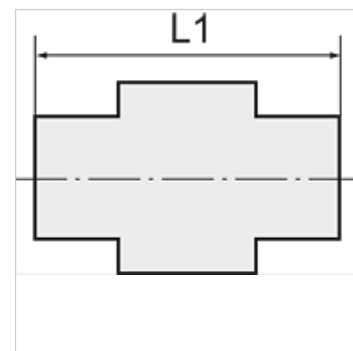

Note

Further information on request

Item					
Identification	Thread	for hose	Note	L1 (mm)	AF
K- 07 40 30 67	M 5	4 mm / 2 mm		23,0	9 mm
K- 07 40 30 68	M 5	5 mm / 3 mm	without O-ring	20,0	8 mm
K- 07 40 30 69	M 5	6 mm / 4 mm		23,0	9 mm
K- 07 40 30 81	G 1/8	5 mm / 3 mm	without O-ring	23,0	14 mm
K- 07 40 30 82	G 1/8	6 mm / 4 mm		25,0	13 mm
K- 07 40 30 84	G 1/8	8 mm / 6 mm		25,0	14 mm
K- 07 40 30 80	G 1/8	10 mm / 8 mm	without O-ring	27,0	14 mm
K- 07 40 30 76	G 1/4	6 mm / 4 mm		27,0	16 mm
K- 07 40 30 78	G 1/4	8 mm / 6 mm		27,0	16 mm
K- 07 40 30 74	G 1/4	10 mm / 8 mm		29,0	16 mm
K- 07 40 30 88	G 3/8	6 mm / 4 mm	without O-ring	29,0	19 mm
K- 07 40 30 89	G 3/8	8 mm / 6 mm		29,0	19 mm
K- 07 40 30 86	G 3/8	10 mm / 8 mm		31,0	19 mm
K- 07 40 30 87	G 3/8	12 mm / 10 mm		33,0	19 mm
K- 07 40 30 72	G 1/2	6 mm / 4 mm		32,0	24 mm
K- 07 40 30 73	G 1/2	8 mm / 6 mm		32,0	24 mm
K- 07 40 30 70	G 1/2	10 mm / 8 mm		33,0	24 mm
K- 07 40 30 71	G 1/2	12 mm / 10 mm		35,0	24 mm