



# K-T AG DREH 1

Male branch tees, swivel type, parallel male thread (M5 - non-swivel type, w/o O-ring)

**HANSA FLEX**

## Properties

Working pressure	Max. 18 bar
Sealant	Buna-N
Material	Nickel-plated brass

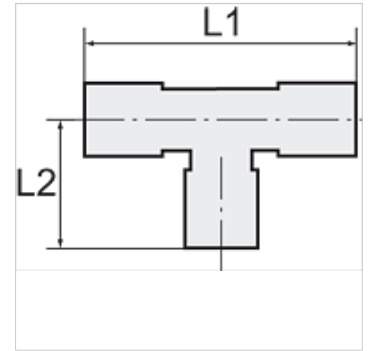

## Note

Further information on request

## Item

Identification	Thread	for hose	L1 (mm)	L2 (mm)	AF
K- 07 40 41 46	M 5	5 mm / 3 mm	43,0	15,0	8 mm
K- 07 40 32 12	G 1/8	6 mm / 4 mm	39,0	22,0	13 mm
K- 07 40 32 13	G 1/8	8 mm / 6 mm	45,0	20,0	14 mm
K- 07 40 32 10	G 1/4	6 mm / 4 mm	39,0	26,0	16 mm
K- 07 40 32 11	G 1/4	8 mm / 6 mm	40,0	27,5	16 mm
K- 07 40 32 09	G 1/4	10 mm / 8 mm	45,0	27,5	16 mm