


K-SDR AG OR

Banjo elbows, parallel male thread with O-ring

HANSA FLEX

Properties

Working pressure	Max. 18 bar
Sealant	Buna-N
Material	Nickel-plated brass

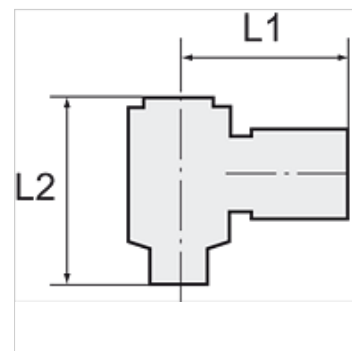

Note

Further information on request

Item						
Identification	Thread	for hose	L1 (mm)	L2 (mm)	Socket head	AF
K- 07 40 31 52	M 5	5 mm / 3 mm	16,0	17,5	Male	8 mm
K- 07 40 31 53	M 5	6 mm / 4 mm	16,0	17,5	Male	8 mm
K- 07 40 31 61	G 1/8	5 mm / 3 mm	24,0	28,0	Male	14 mm
K- 07 40 31 62	G 1/8	6 mm / 4 mm	24,0	28,0	Male	14 mm
K- 07 40 31 63	G 1/8	8 mm / 6 mm	24,0	28,0	Male	14 mm
K- 07 40 31 60	G 1/8	10 mm / 8 mm	24,0	28,0	Male	14 mm
K- 07 40 31 58	G 1/4	6 mm / 4 mm	26,0	33,0	Male	17 mm
K- 07 40 31 59	G 1/4	8 mm / 6 mm	26,0	33,0	Male	17 mm
K- 07 40 31 57	G 1/4	10 mm / 8 mm	27,5	33,0	Male	17 mm
K- 07 40 31 66	G 3/8	6 mm / 4 mm	26,0	36,0	Male	19 mm
K- 07 40 31 67	G 3/8	8 mm / 6 mm	28,5	37,0	Male	20 mm
K- 07 40 31 64	G 3/8	10 mm / 8 mm	29,0	37,0	Male	20 mm
K- 07 40 31 65	G 3/8	12 mm / 10 mm	31,5	36,0	Female	5 mm
K- 07 40 31 56	G 1/2	8 mm / 6 mm	29,0	42,0	Male	24 mm
K- 07 40 31 54	G 1/2	10 mm / 8 mm	30,5	42,0	Male	27 mm
K- 07 40 31 55	G 1/2	12 mm / 10 mm	33,0	42,0	Female	8 mm