

# K-W90 VERBINDER PP

Union elbows

**HANSA FLEX**


## Properties

**Working pressure** on request

**Operating temperature** Max. +20 °C

**Material** Polypropylene (PP)

**Sealant** NBR

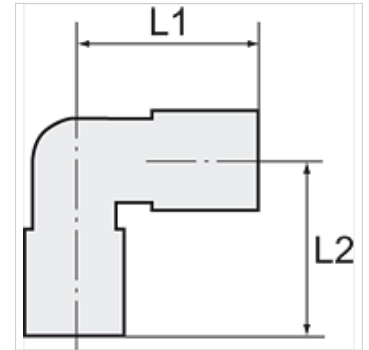

## Note

Further information on request

## Description

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

## Item

Identification	for external hose $\varnothing$	L1 (mm)	L2 (mm)
K- 07 40 28 62	32 mm	99,7	99,7