

K-W90 VERBINDER PP

Union elbows

HANSA FLEX


Properties

Working pressure on request

Operating temperature Max. +20 °C

Material Polypropylene (PP)

Sealant NBR

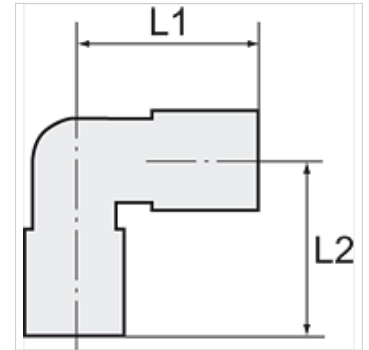

Note

Further information on request

Description

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Item

Identification	for external hose \varnothing	L1 (mm)	L2 (mm)
K- 07 40 28 62	32 mm	99,7	99,7