
# K-RD NIPPEL LANG 1


Reducing nipples, long type

HANSA-FLEX

## Properties

| | |
|---|---|
| **Working pressure** | 10 bar |
| **Media temperature** | max. +90 °C |
| **Ambient temperature** | Max. +90 °C |
| **Material** | Brass with a bare metal surface |



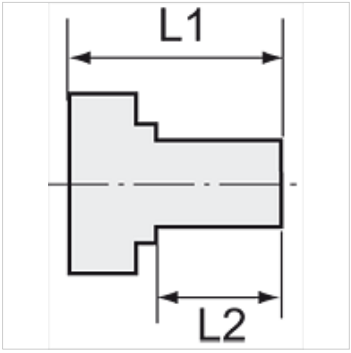


## Note

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.
Further information on request

## Additional information

Further types and dimensions on request.

## Item

| Identification | Male thread | Female thread | L1 (mm) | L2 (mm) | AF |
|---|---|---|---|---|---|
| **K- 07 40 00 65** | M 5 | M 5 | 15,0 | 5,0 | 8 mm |
| **K- 07 40 00 66** | M 5 | G 1/8 | 17,0 | 5,0 | 14 mm |
| **K- 07 40 00 67** | G 1/8 | M 5 | 17,0 | 7,0 | 14 mm |
| **K- 07 40 00 64** | G 1/8 | G 1/4 | 26,0 | 10,0 | 17 mm |
| **K- 07 40 00 70** | G 1/4 | G 1/8 | 28,0 | 10,0 | 17 mm |
| **K- 07 40 00 71** | G 1/4 | G 1/4 | 28,0 | 10,0 | 17 mm |
| **K- 07 40 00 68** | G 1/4 | G 3/8 | 26,0 | 10,0 | 19 mm |
| **K- 07 40 00 72** | G 3/8 | G 1/4 | 29,0 | 10,0 | 19 mm |
| **K- 07 40 00 73** | G 3/8 | G 3/8 | 29,0 | 10,0 | 19 mm |
| **K- 07 40 00 69** | G 3/8 | G 1/2 | 27,0 | 12,0 | 24 mm |
| **K- 07 40 00 74** | G 1/2 | G 3/8 | 34,0 | 12,0 | 24 mm |
| **K- 07 40 00 75** | G 1/2 | G 1/2 | 34,0 | 12,0 | 24 mm |
| **K- 07 40 00 76** | G 1/2 | G 3/4 | 38,0 | 13,0 | 32 mm |
| **K- 07 40 00 77** | G 3/4 | G 1 | 26,0 | 11,0 | 36 mm |

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*