


K-MUFFEN SK MS NI

Sockets with outer hex - nickel-plated brass

HANSA**FLEX**

Properties

| | |
|-----------------------|---------------------|
| Operating temperature | Max. 150 °C |
| Pressure | Max. 60 bar |
| Material | Nickel-plated brass |

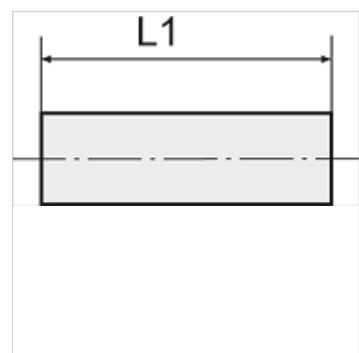

Note

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.
Further information on request

Description

Suitable for air, water, oil, steam, etc.

Additional information

Further types and dimensions on request.

Item

| Identification | Thread | L1 (mm) | AF |
|----------------|--------|------------|-------|
| K-07 40 15 06 | M 5 | 11,0 | 8 mm |
| K-07 40 15 07 | G 1/8 | 15,0 | 14 mm |
| K-07 40 15 08 | G 1/4 | 22,0 | 17 mm |
| K-07 40 15 09 | G 3/8 | 24,0 | 22 mm |
| K-07 40 15 11 | G 1/2 | 30,0 | 27 mm |
| K-07 40 15 10 | G 3/4 | 32,0 | 32 mm |
| K-07 40 15 12 | G 1 | 35,0 | 38 mm |