



K-VLST K AG IG MS NI

Extensions, short, parallel - nickel-plated brass

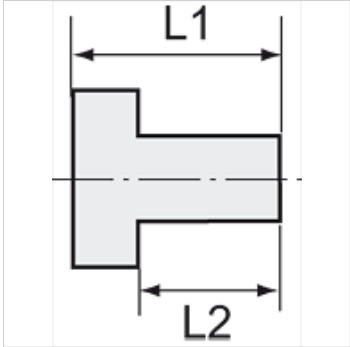

Properties	
Operating temperature	Max. 150 °C
Pressure	Max. 60 bar
Material	Nickel-plated brass



Note
The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.
Further information on request

Description
Suitable for air, water, oil, steam, etc.

Additional information
Further types and dimensions on request.

Item					
Identification	Male thread	Female thread	L1 (mm)	L2 (mm)	AF
K- 07 40 39 01	M 5	G 1/8	17,0	4,0	12 mm
K- 07 40 39 02	G 1/8	G 1/8	18,5	6,0	14 mm
K- 07 40 39 03	G 1/8	G 1/4	21,5	6,0	17 mm
K- 07 40 39 04	G 1/4	G 1/4	22,5	8,0	17 mm
K- 07 40 39 05	G 1/4	G 3/8	26,0	8,0	22 mm
K- 07 40 39 06	G 3/8	G 3/8	26,5	9,0	22 mm
K- 07 40 39 07	G 3/8	G 1/2	29,5	9,0	24 mm
K- 07 40 39 08	G 1/2	G 1/2	29,5	10,0	25 mm