


K-VLST 2 X IG MS NI

Extensions, 2 x female thread, parallel - nickel-plated brass

HANSA**FLEX**

Properties

| | |
|-----------------------|---------------------|
| Operating temperature | Max. 150 °C |
| Pressure | Max. 60 bar |
| Material | Nickel-plated brass |

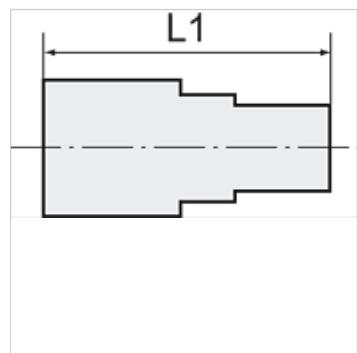

Note

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.
Further information on request

Description

Suitable for air, water, oil, steam, etc.

Additional information

Further types and dimensions on request.

Item

| Identification | Thread 1 | Thread 2 | L1 (mm) | AF |
|----------------|----------|----------|------------|-------|
| K-07 40 39 09 | M 5 | G 1/8 | 13,5 | 14 mm |
| K-07 40 39 10 | G 1/8 | G 1/4 | 21,5 | 17 mm |
| K-07 40 39 11 | G 1/8 | G 3/8 | 23,5 | 22 mm |
| K-07 40 39 12 | G 1/4 | G 3/8 | 25,5 | 22 mm |
| K-07 40 39 13 | G 1/4 | G 1/2 | 28,5 | 24 mm |
| K-07 40 39 14 | G 3/8 | G 1/2 | 29,5 | 24 mm |
| K-07 40 39 15 | G 1/2 | G 3/4 | 30,0 | 32 mm |
| K-07 40 43 91 | G 1/2 | G 1/8 | 24,0 | 24 mm |
| K-07 40 43 92 | G 1 | G 3/4 | 25,0 | 38 mm |