

K-SCHLAUCHTUELLEN MS

Hose fittings

HANSA FLEX


Properties

Working pressure 10 bar

Media temperature max. +90 °C

Ambient temperature Max. +90 °C

Material Brass

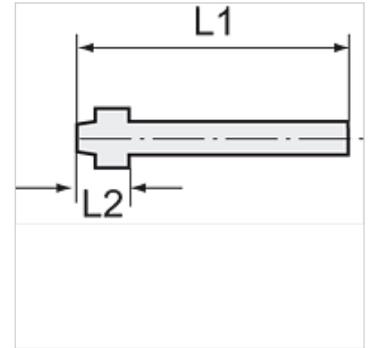

Note

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes.
Further information on request

Additional information

Further types and dimensions on request.

Item

| Identification | for hose | for union nut | L1 (mm) | L2 (mm) |
|----------------|----------|---------------|------------|------------|
| K- 07 40 16 61 | LW 4 mm | G 1/8 | 47,0 | 12,0 |
| K- 07 40 16 52 | LW 4 mm | G 1/4 | 47,0 | 13,5 |
| K- 07 40 16 54 | LW 9 mm | G 1/4 | 47,0 | 13,5 |
| K- 07 40 16 55 | LW 4 mm | G 3/8 | 48,5 | 15,0 |
| K- 07 40 16 58 | LW 6 mm | G 1/2 | 48,5 | 15,0 |
| K- 07 40 16 60 | LW 13 mm | G 1/2 | 48,5 | 15,0 |