


# K-SCHWENKTUELLE MS

Swivel hose fittings, parallel male thread

## Properties

<b>Working pressure</b>	10 bar
<b>Media temperature</b>	max. +90 °C
<b>Ambient temperature</b>	Max. +90 °C
<b>Material</b>	Nickel-plated brass (banjo bolt), brass (ring nipple)

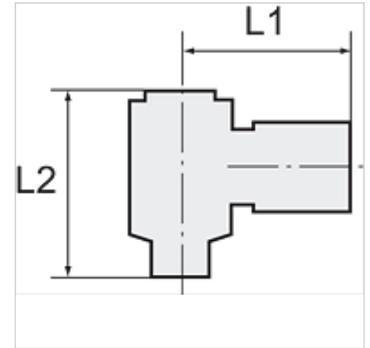

## Note

The dimensions of the standard screw fittings may change slightly during the life of the catalogue as a result of optimisation processes. Further information on request

## Additional information

Further types and dimensions on request.

## Item

Identification	Thread	for hose	L1 (mm)	L2 (mm)	AF
K- 07 40 34 39	G 1/8	LW 4 mm	26,0	28,0	14 mm
K- 07 40 34 40	G 1/8	LW 6 mm	26,0	28,0	14 mm
K- 07 40 34 41	G 1/4	LW 6 mm	28,0	29,0	17 mm
K- 07 40 34 42	G 1/4	LW 9 mm	28,0	30,5	17 mm
K- 07 40 34 43	G 3/8	LW 6 mm	30,0	32,0	22 mm
K- 07 40 34 44	G 3/8	LW 9 mm	30,0	32,0	22 mm