



# K-VTL KUGELHAEHNE

Distributor block

**HANSA FLEX**

## Properties

<b>Mounting</b>	2 mounting holes in housing (screw size M 5)
<b>Pressure range</b>	Max. +10 bar, rough vacuum
<b>Temp. range</b>	-10 °C to +100 °C
<b>Thread ball valve</b>	G 1/4
<b>Housing</b>	Die-cast aluminium
<b>Ball, spindle</b>	Ms 58, chrome-plated
<b>Ball seals</b>	PTFE
<b>O-ring</b>	NBR

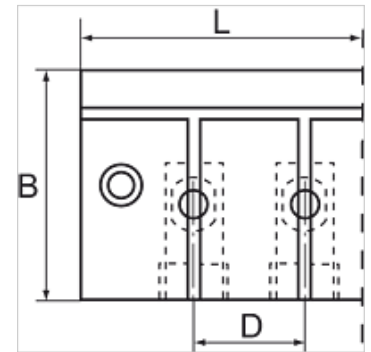

## Note

Further information on request

## Description

Distributor and isolator block for machines and installations where it is necessary to close individual circuits. This block contains 6, 8 or 10 ball valves that can be adjusted using a screwdriver.

Valves are also available with coil 110 V AC, 50 Hz and in a pneumatically operated version. Please ask for more information.

Item						
Identification	amount of ball valves	Thread outlet	Thread inlet	B (mm)	D (mm)	L (mm)
K- 07 40 40 46	6	G 3/8	G 3/8"	52,0	25,0	175,0
K- 07 40 40 47	8	G 3/8	G 3/8"	52,0	25,0	225,0
K- 07 40 40 45	10	G 3/8	G 3/8"	52,0	25,0	275,0