

K-VTST 2 AB MS


Distributor pieces, brass, with 2 outlets

HANSA**FLEX**

Properties

Connection G 3/4 and G 1 incl. PTFE-sealing at outer thread,
G 1 1/4 without sealing

Operating pressure Max. 10 bar

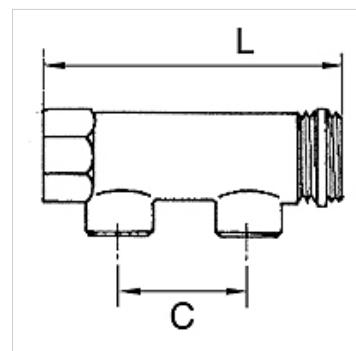

Note

Further information on request

Description

For assembling compressed air taps. End fittings with 1 x male and 1 x female thread, outlets optionally with male or female thread.

Item	Identification	Output	Input	C (mm)	L (mm)
K-07 40 40 49		2 x 1/2 male	2 x 3/4	50,0	110,0
K-07 40 40 50		2 x 1/2 female	2 x 3/4	50,0	110,0
K-07 40 40 51		2 x 1/2 male	2 x 1	50,0	113,0
K-07 40 40 52		2 x 1/2 female	2 x 1	50,0	113,0
K-07 40 40 53		2 x 1/2 male	2 x 1 1/4	60,0	137,0
K-07 40 40 54		2 x 1/2 female	2 x 1 1/4	60,0	137,0