

K-VTST 3 AB MS


Distributor pieces, brass, with 3 outlets

HANSA**FLEX**

Properties

Connection G 3/4 and G 1 incl. PTFE-sealing at outer thread,
G 1 1/4 without sealing

Operating pressure Max. 10 bar

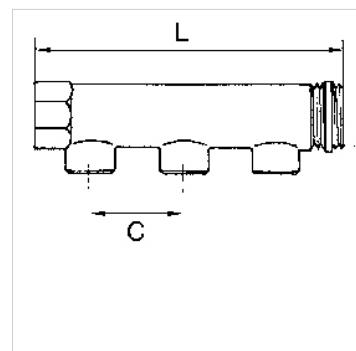

Note

Further information on request

Description

For assembling compressed air taps. End fittings with 1 x male and 1 x female thread, outlets optionally with male or female thread.

Item	Identification	Output	Input	C (mm)	L (mm)
	K-07 40 40 55	3 x 1/2 male	2 x 3/4	50,0	160,0
	K-07 40 40 56	3 x 1/2 female	2 x 3/4	50,0	160,0
	K-07 40 40 57	3 x 1/2 male	2 x 1	50,0	163,0
	K-07 40 40 58	3 x 1/2 female	2 x 1	50,0	163,0
	K-07 40 40 59	3 x 1/2 male	2 x 1 1/4	60,0	197,0
	K-07 40 40 60	3 x 1/2 female	2 x 1 1/4	60,0	197,0