


K-DBV MANO 1/4"

Pressure limiting valves size 1/4

HANSA**FLEX**

Properties

Design	Spring-loaded, non-return diaphragm valve with adjustable opening pressure
Media temperature	max. 60 °C
Ambient temperature	Max. 60 °C
Sealant	NBR
Spring bonnet	POM/brass
Housing	Die-cast zinc, painted silver
Diaphragm	NBR

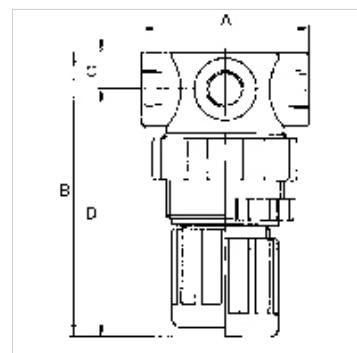

Note

Further information on request

Description

Manually adjustable overflow valves. For protecting pneumatic systems against damage caused by excess pressure.

Item

Identification	Thread	Control range	A (mm)	B	C (mm)	D (mm)
K-07 25 01 93	G 1/4	0.1 - 2.0 bar	43,0	70.0 mm	10,0	60,0
K-07 25 01 94	G 1/4	0.1 - 3.0 bar	43,0	70.0 mm	10,0	60,0
K-07 25 01 95	G 1/4	0.15 - 7.0 bar	43,0	70.0 mm	10,0	60,0
K-07 25 01 96	G 1/4	0.5 - 10.0 bar	43,0	70.0 mm	10,0	60,0

Spare parts

K-HALTERBAUSATZ	Holder
K-SCHALTTAFELMUTTER	Nut
K-VERSCHLEI-SATZ	Set of wearing parts
K-SCHALLDAE SINTERBR AG 569	Silencers, sintered bronze, flat type with male thread, 569 Series
K-GERAETESTECKER	Coupling socket