


K-GROSSDRUCKREGLER

Large pressure regulators

HANSA FLEX

Properties

Input pressure	Max. 40 bar
Media temperature	max. 60 °C
Ambient temperature	Max. 90 °C
Flow rate	2500 l/min
Sealant	NBR
Housing	Aluminium
Flow rate measurement	At P1 = 8 bar, P2 = 6 bar and pressure drop Δp = 1 bar

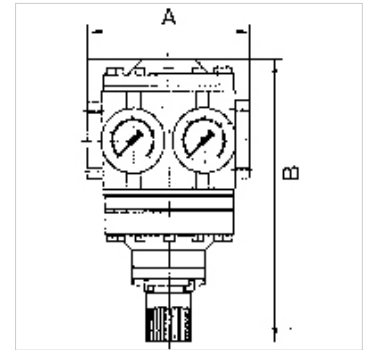

Note

Further information on request

Description

Diaphragm pressure regulators, independent of inlet pressure, with internal pilot control and self-relieving design. Separate indication of input and working pressure on two pressure gauges. The pressure setting can be locked by pushing the button down. We recommend always using these controllers in conjunction with our K-07250615 and K-07250615 filters.

Item

Identification	Thread	Control range	A (mm)	B	DN
K- 07 25 08 11	G 1 1/2	0.5 - 6 bar	180,0	246.0 mm	50
K- 07 25 08 12	G 1 1/2	0.5 - 10 bar	180,0	246.0 mm	50
K- 07 25 08 13	G 1 1/2	0.5 - 16 bar	180,0	246.0 mm	50
K- 07 25 08 14	G 1 1/2	0.5 - 25 bar	180,0	246.0 mm	50
K- 07 25 08 15	G 2	0.5 - 6 bar	160,0	246.0 mm	50
K- 07 25 08 16	G 2	0.5 - 10 bar	160,0	246.0 mm	50
K- 07 25 08 17	G 2	0.5 - 16 bar	160,0	246.0 mm	50
K- 07 25 08 18	G 2	0.5 - 25 bar	160,0	246.0 mm	50

Spare parts

K-HALTERBAUSATZ	Holder
K-VERSCHLEI-SATZ	Set of wearing parts
K-XV AGM 2	Double nipples, parallel male thread