


K-HOCHLEIST DRUCKREGLER

Heavy-duty pressure regulators

HANSA FLEX

Properties

Input pressure	Max. 25 bar
Media temperature	max. 60 °C
Ambient temperature	Max. 60 °C
Flow rate	50000 l/min
Sealant	NBR
Housing	Aluminium, painted silver
Flow rate measurement	At P1 = 8 bar, P2 = 6 bar and pressure drop Δp = 1 bar

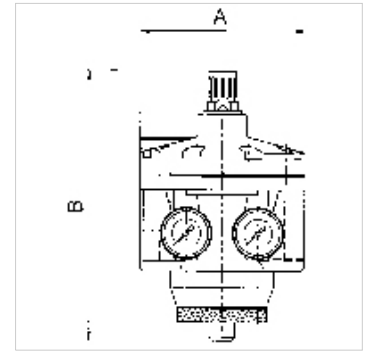

Note

Further information on request

Description

Diaphragm pressure regulators, independent of inlet pressure, with internal pilot control and self-relieving design for very high flow rates. Separate indication of input and working pressure on two pressure gauges. The pressure setting can be locked by pushing the knob down. We recommend always using these controllers in conjunction with our K-07250607 and K-07250609 filters.

Item					
Identification	Thread	Control range	A (mm)	B	DN
K- 07 25 08 03	G 1 1/2	0.1 - 3 bar	188,0	261.0 mm	50
K- 07 25 08 04	G 1 1/2	0.2 - 6 bar	188,0	261.0 mm	50
K- 07 25 08 05	G 1 1/2	0.5 - 10 bar	188,0	261.0 mm	50
K- 07 25 08 06	G 1 1/2	0.5 - 16 bar	188,0	261.0 mm	50
K- 07 25 08 07	G 2	0.1 - 3 bar	160,0	261.0 mm	50
K- 07 25 08 08	G 2	0.2 - 6 bar	160,0	261.0 mm	50
K- 07 25 08 09	G 2	0.5 - 10 bar	160,0	261.0 mm	50
K- 07 25 08 10	G 2	0.5 - 16 bar	160,0	261.0 mm	50

Spare parts

K-VERSCHLEI-SATZ	Set of wearing parts
K-LOESBARE DOPPELNIPPEL MS	Double nipples