K-FI MIKRO PC-BEHAEL MULTIFIX MINI


Micro-filters with polycarbonate bowl

HANSA FLEX

Properties

Input pressure	Max. 16 bar
Media temperature	max. 60 °C
Ambient temperature	Max. 60 °C
Filter rating	0,01 µm
Efficiency	99.999 %
Sealant	NBR
Filter insert	Borosilicate-POM
Housing	Die-cast zinc
Drain valve	Semi-automatic
Flow rate measurement	FM at P1 = 6 bar and pressure drop Δp = 0.09 bar



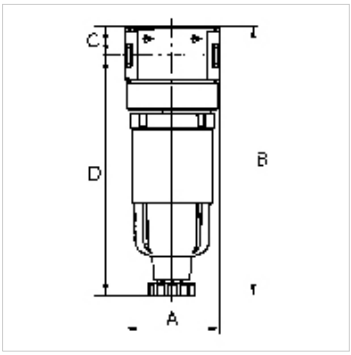

Note

If several devices in the »multifix-mini« Series are assembled together, the maximum working pressure is 12 bar.
Further information on request

Description

Micro-filters for compliance with strict compressed air purity requirements. Suitable for all applications where standard filters do not afford the desired efficiency.

Item

Identification	Thread	Flow rate (L/min)	A (mm)	B	C (mm)	D (mm)	DN
K- 07 25 10 54	G 1/8	230	40,0	114.8 mm	12,3	102,5	5
K- 07 25 10 56	G 1/4	450	40,0	138.1 mm	12,3	125,8	5

Spare parts

K-AUTOMAT ABLASSVENTIL	Automatic drain valve
K-KOPPELPAKET MEHR	Coupling packet

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.