


K-VORFI PC-BEHAELTER MULTIFIX MINI

Pre-filters with polycarbonate bowl

HANSA FLEX

Properties

| | |
|-----------------------|--|
| Input pressure | Max. 16 bar |
| Media temperature | max. 60 °C |
| Ambient temperature | Max. 60 °C |
| Filter rating | 0,30 µm |
| Efficiency | 99.999 % |
| Sealant | NBR |
| Filter insert | Paper-POM |
| Housing | Die-cast zinc |
| Drain valve | Semi-automatic |
| Flow rate measurement | FV at P1 = 6 bar and pressure drop $\Delta p = 0.02$ bar |

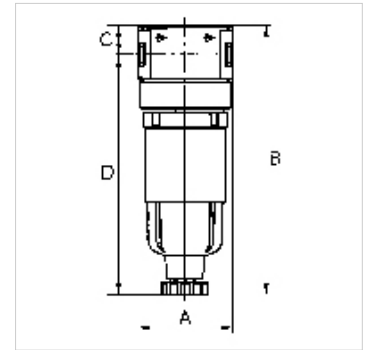

Note

If several devices in the »multifix-mini« Series are assembled together, the maximum working pressure is 12 bar.
Further information on request

Description

Micro-filters for compliance with strict compressed air purity requirements. Suitable for all applications where standard filters do not afford the desired efficiency.

| Item | | | | | | | |
|----------------|--------|-------------------|--------|----------|--------|--------|----|
| Identification | Thread | Flow rate (L/min) | A (mm) | B | C (mm) | D (mm) | DN |
| K- 07 25 10 64 | G 1/8 | 130 | 40,0 | 114.8 mm | 12,3 | 102,5 | 5 |
| K- 07 25 10 66 | G 1/4 | 160 | 40,0 | 138.1 mm | 12,3 | 125,8 | 5 |

Spare parts

| | |
|------------------------|-----------------------|
| K-AUTOMAT ABLASSVENTIL | Automatic drain valve |
| K-KOPPELPAKET MEHR | Coupling packet |