


# K-DRG FL RUECKSTERERBAR M MANO VA

Non-reversible, stainless steel pressure regulators for liquid media,  
stainless steel pressure gauge



Properties	
Input pressure	Max. 30 bar (Control range 0.5 - 8.0 bar), Max. 50 bar (Control range 1.0 - 15.0 bar)
Media temperature	max. 80 °C
Ambient temperature	Max. 80 °C
Sealant	FKM
Diaphragm	PTFE on NBR base
Material	stainless steel 1.4404 (AISI 316L)
Flow rate measurement	At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p \leq 1$ bar

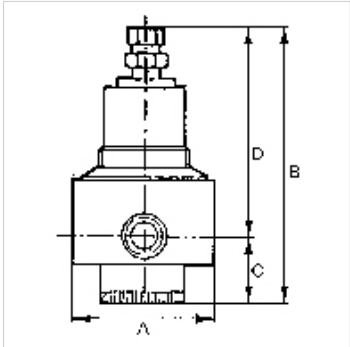

**Note**  
Further information on request

**Description**  
Stainless steel regulators containing no non-ferrous metals for use in the food processing, chemical, mining, plant construction and special machinery industries as well as in the medical technology.

**Ordering information**  
NPT thread available on request

Item							
Identification	Thread	Control range	Flow rate (L/min)	A (mm)	B	C (mm)	D (mm)
K- 07 25 02 10	G 1/4	0.5 - 8.0 bar	200	65,0	162.0 mm	37,0	125,0
K- 07 25 02 11	G 1/4	1.0 - 15.0 bar	330	65,0	162.0 mm	37,0	125,0
K- 07 25 02 08	G 1/2	0.5 - 8.0 bar	660	80,0	164.0 mm	37,0	127,0
K- 07 25 02 09	G 1/2	1.0 - 15.0 bar	1800	80,0	164.0 mm	37,0	127,0

Spare parts	
K-HALTERBAUSATZ EDELSTAHL	Holder
K-MANO	Pressure gauges (CrNi steel type / connection on rear)
K-VERSCHLEI-SATZ	Set of wearing parts