


# K-WV 3/2 ELK 230 VAC / 50HZ HANSA

3/2-way valves, electrically operated, with 230 VAC / 50 Hz solenoid

**HANSA FLEX**

## Properties

|  |   |
|--|---|
| Input pressure                         | 2 - 10 bar                                      |
| Temp. range                            | -10 °C to +50 °C                                |
| Media                                  | Compressed air                                  |
| rush-in power alternating current 50Hz | 2,2 VA  |
| Duty cycle                             | ED 100 %  |
| Electrical connection                  | Connector type C, ISO 15217, 2 poles + PE       |
| holding power alternating current 50Hz | 1,6 VA  |
| Power consumption DC                   | 2,5 W   |
| Protection IP                          | IP 65   |
| Connection thread                      | Material: Die-cast zinc                         |
| Housing                                | Material: Grivory® (PA 66)                      |
| Flow rate measurement                  | At P2 = 6 bar, pressure drop $\Delta p$ = 1 bar |

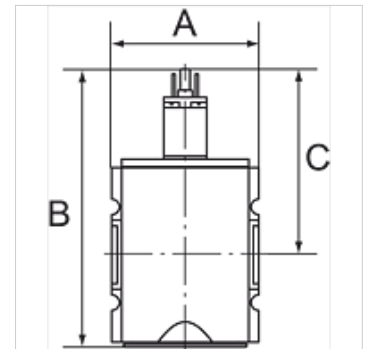

## Note

Further information on request

## Description

Pneumatic systems or parts of systems can be switched on and off by means of an electrical signal. When they are switched off, the system is exhausted at the same time.

## Ordering information

Valves are also available with coil 110 V AC, 50 Hz and in a pneumatically operated version. Please ask for more information.

| Item           |        |        |                   |        |          |        |
|----------------|--------|--------|-------------------|--------|----------|--------|
| Identification | Thread | Outlet | Flow rate (L/min) | A (mm) | B        | C (mm) |
| K- 07 25 11 09 | G 1/4  | 1/4    | 2000              | 52,0   | 117.8 mm | 84,8   |
| K- 07 25 11 10 | G 3/8  | 1/4    | 2000              | 52,0   | 117.8 mm | 84,8   |
| K- 07 25 11 35 | G 3/8  | 1/2    | 4500              | 63,0   | 150.3 mm | 93,8   |
| K- 07 25 11 36 | G 1/2  | 1/2    | 4500              | 63,0   | 150.3 mm | 93,8   |
| K- 07 25 11 41 | G 3/4  | 1/2    | 12500             | 85,0   | 177.7 mm | 110,7  |
| K- 07 25 11 42 | G 1    | 1/2    | 12500             | 85,0   | 177.7 mm | 110,7  |

## Accessories

|                             |   |
|-----------------------------|---|
| K-SCHALLDAE SINTERBR S      | Silencers, sintered bronze, slotted                                 |
| K-SCHALLDAE SINTERBR GE MS1 | Silencers, sintered bronze, with brass hexagon nut and brass thread |

## Spare parts

|                         |                            |
|-------------------------|----------------------------|
| K-HALTERBAUSATZ HANSA   | Holder HANSA               |
| K-VORSTEUERVENTIL HANSA | Replacement solenoid HANSA |
| K-GERAETESTECKER FORM C | Connector                  |