


# K-BEFUELLEINHEIT 24VDC HANSA

Filling units, electrically operated, with 24 VDC / 2.5 W solenoid, adjustable filling time

**HANSA FLEX**

## Properties

Input pressure	2 - 10 bar
Temp. range	-10 °C to +50 °C
Media	Compressed air
rush-in power alternating current 50Hz	2,2 VA
Duty cycle	ED 100 %
Electrical connection	Connector type C, ISO 15217, 2 poles + PE
holding power alternating current 50Hz	1,6 VA
Power consumption DC	2,5 W
Protection IP	IP 65
Connection thread	Material: Die-cast zinc
Housing	Material: Grivory® (PA 66)
Flow rate measurement	At P2 = 6 bar, pressure drop $\Delta p = 1$ bar

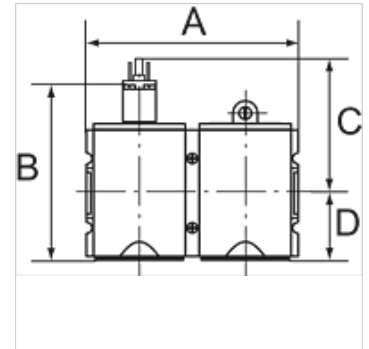

## Note

Further information on request

## Description

The filling unit protects devices connected downstream by ensuring a gradual build-up of pressure. The unit consists of a 3/2-way valve and a filling valve (start-up valve). It is connected and disconnected by means of the 3/2-way valve. The filling time can be altered by turning the adjusting screw.

## Ordering information

Filling units are also available with coil 110 V AC, 50 Hz and in a pneumatically operated version. Please ask for more information.

## Item

Identification	Thread	Outlet	Flow rate (L/min)	A (mm)	B	C (mm)	D (mm)
K- 07 25 10 99	G 1/4	1/4	1300	104,0	117.8 mm	84,8	33,0
K- 07 25 11 00	G 3/8	1/4	1300	104,0	117.8 mm	84,8	33,0
K- 07 25 11 25	G 3/8	1/2	3400	126,0	150.3 mm	93,8	56,5
K- 07 25 11 26	G 1/2	1/2	3400	126,0	150.3 mm	93,8	56,5
K- 07 25 11 47	G 3/4	1/2	8750	170,0	177.7 mm	110,7	67,0
K- 07 25 11 48	G 1	1/2	8750	170,0	177.7 mm	110,7	67,0

## Accessories

K-SCHALLDAE SINTERBR S	Silencers, sintered bronze, slotted
K-SCHALLDAE SINTERBR GE MS1	Silencers, sintered bronze, with brass hexagon nut and brass thread

## Spare parts

K-HALTERBAUSATZ HANSA	Holder HANSA
K-VORSTEUERVENTIL HANSA	Replacement solenoid HANSA
K-GERAETESTECKER FORM C	Connector