


# K-FI REGL PC-BEHÄLTER S MANO HANSA

Filter regulators

**HANSA FLEX**

## Properties

<b>Input pressure</b>	1.5 - 16 bar
<b>Output pressure</b>	0.5 - 8 bar
<b>Temp. range</b>	-10 °C to +50 °C
<b>Media</b>	Compressed air
<b>Filter rating</b>	5,00 µm
<b>Connection thread</b>	Material: Die-cast zinc
<b>Container</b>	Polycarbonate (with bayonet lock)
<b>Filter element</b>	Cellpor (PE)
<b>Housing</b>	Material: Grivory® (PA 66)
<b>Diaphragm</b>	NBR
<b>Internal air consumption</b>	Max. 1.5 l/min (depending on secondary pressure)
<b>Flow rate measurement</b>	At P1 = 10 bar, P2 = 6.3 bar and pressure drop $\Delta p = 1$ bar

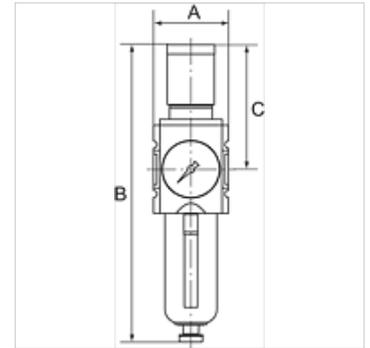

## Note

Further information on request

## Description

Filter regulators with excellent flow rates in modern design. The regulator knob can be latched and locked.

## Ordering information

The price does not include a key lock. Please order separately.

## Item

Identification	Thread	Flow rate (L/min)	A (mm)	B	C (mm)	Size	condensate outlet
K- 07 25 06 57	G 1/4	2200	52,0	225.0 mm	95,5	-	Semi
K- 07 25 06 58	G 3/8	2600	52,0	225.0 mm	95,5	-	Semi
K- 07 25 06 59	G 3/8	4300	63,0	257.0 mm	110,0	-	Semi
K- 07 25 06 60	G 1/2	5200	63,0	257.0 mm	110,0	-	Semi
K- 07 25 06 53	G 3/4	14000	85,0	329.0 mm	137,0	-	Semi
K- 07 25 06 54	G 1	14000	85,0	329.0 mm	137,0	-	Semi
K- 07 25 06 61	G 1/4	2200	52,0	243.0 mm	95,5	-	Auto
K- 07 25 06 62	G 3/8	2600	52,0	243.0 mm	95,5	-	Auto
K- 07 25 06 63	G 3/8	4300	63,0	274.0 mm	110,0	-	Auto
K- 07 25 06 64	G 1/2	5200	63,0	274.0 mm	110,0	-	Auto
K- 07 25 06 55	G 3/4	14000	85,0	343.0 mm	137,0	4	Auto
K- 07 25 06 56	G 1	14000	85,0	343.0 mm	137,0	4	Auto

## Accessories

K-STECKSCHLOSS Key lock

## Spare parts

K-HALTERBAUSATZ HANSA	Holder HANSA
K-ERSATZBEHÄLTER HANSA POLY	Spare tank HANSA polycarbonat
K-SCHALTAFELMUTTER HANSA	Nut HANSA
K-FILTERELEMENT	Filter element
K-DICHTSATZ HANSA	Set of seals HANSA