


K-VERTEILER HANSA

Manifolds

HANSA FLEX

Properties

| | |
|--------------------------|----------------------------|
| Input pressure | 0 - 16 bar |
| Temp. range | -10 °C to +50 °C |
| Media | Compressed air |
| Connection thread | Material: Die-cast zinc |
| Housing | Material: Grivory® (PA 66) |

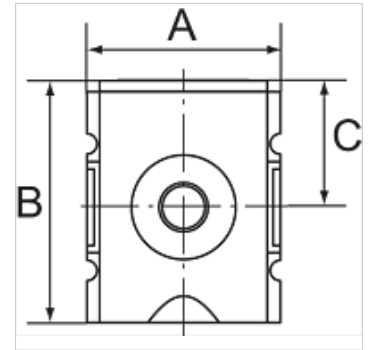

Note

Further information on request

Item

| Identification | Outlets | Thread | Flow rate (L/min) | A (mm) | B | C (mm) |
|----------------|---------------------------------|--------|-------------------|--------|----------|--------|
| K- 07 25 11 17 | 3 x G 1/4 | G 1/4 | 2700 | 52,0 | 65.5 mm | 34,5 |
| K- 07 25 11 18 | 3 x G 1/4 | G 3/8 | 3600 | 52,0 | 65.5 mm | 34,5 |
| K- 07 25 11 19 | 2 x G 3/8, 1 x G 1/4, 1 x G 1/2 | G 3/8 | 7250 | 63,0 | 80.5 mm | 43,0 |
| K- 07 25 11 20 | 2 x G 3/8, 1 x G 1/4, 1 x G 1/2 | G 1/2 | 7250 | 63,0 | 80.5 mm | 43,0 |
| K- 07 25 11 21 | 2 x G 3/4 | G 3/4 | 18000 | 85,0 | 109.5 mm | 58,5 |
| K- 07 25 11 22 | 2 x G 3/4 | G 1 | 18000 | 85,0 | 109.5 mm | 58,5 |

Spare parts

| | |
|------------------------------|-------------------------------|
| K-HALTERBAUSATZ HANSA | Holder HANSA |
| K-ERSATZBEHAELTER HANSA POLY | Spare tank HANSA polycarbonat |
| K-GERAETESTECKER | Coupling socket |