


K-WTEH 2-TLG PC SCHU MANO HANSA

Service units, 2-piece with polycarbonate bowl, bowl guard and pressure gauge

HANSA FLEX

Properties

Input pressure	1.5 - 16 bar
Output pressure	0.5 - 8 bar
Temp. range	-10 °C to +50 °C
Media	Compressed air
Filter rating	5,00 µm
Connection thread	Material: Die-cast zinc
Container	Polycarbonate (with bayonet lock)
Filter element	Cellpor (PE)
Housing	Material: Grivory® (PA 66)
Diaphragm	NBR
Protective cage	Polyamide
Dropper	PA
Internal air consumption	Max. 1.5 l/min (depending on secondary pressure)
Flow rate measurement	At P1 = 10 bar, P2 = 6.3 bar and pressure drop $\Delta p = 1$ bar

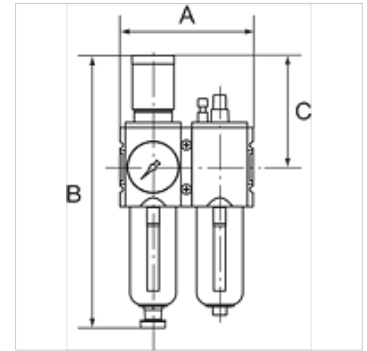

Note

Further information on request

Description

Two or three-piece service units with excellent flow rates in modern design. Lockable diaphragm pressure regulator with secondary ventilation, oil can be filled without interrupting operation.

Ordering information

The price does not include a key lock. Please order separately.

Item						
Identification	Thread	Flow rate (L/min)	A (mm)	B	C (mm)	condensate outlet
K- 07 25 14 77	G 1/4	1800	104,0	225.0 mm	95,5	Semi
K- 07 25 14 78	G 3/8	1800	104,0	225.0 mm	95,5	Semi
K- 07 25 14 79	G 3/8	3500	126,0	257.0 mm	110,0	Semi
K- 07 25 14 80	G 1/2	3500	126,0	257.0 mm	110,0	Semi
K- 07 25 14 81	G 3/4	12000	170,0	329.0 mm	137,0	Semi
K- 07 25 14 82	G 1	12000	170,0	329.0 mm	137,0	Semi
K- 07 25 14 83	G 1/4	1800	104,0	243.0 mm	95,5	Auto
K- 07 25 14 84	G 3/8	1800	104,0	243.0 mm	95,5	Auto
K- 07 25 14 85	G 3/8	3500	126,0	274.0 mm	110,0	Auto
K- 07 25 14 86	G 1/2	3500	126,0	274.0 mm	110,0	Auto
K- 07 25 14 87	G 3/4	12000	170,0	343.0 mm	137,0	Auto
K- 07 25 14 88	G 1	12000	170,0	343.0 mm	137,0	Auto

Accessories

K-STECKSCHLOSS Key lock

Spare parts

K-HALTERBAUSATZ HANSA	Holder HANSA
K-ERSATZBEHAELTER HANSA POLY	Spare tank HANSA polycarbonat
K-FILTERELEMENT	Filter element
K-TROPFAUFSATZ HANSA	Drip attachment HANSA



Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.

06.09.2025

HANSA-FLEX AG

www.hansa-flex.com

1

K-WTEH 2-TLG PC SCHU MANO HANSA

Service units, 2-piece with polycarbonate bowl, bowl guard and pressure gauge

