
K-FI PC-BEHAELTER MULTIFIX

Filters with polycarbonate bowl

Properties

Input pressure	Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl)
Media temperature	max. 60 °C
Ambient temperature	Max. 60 °C
Pore size in filter element	5 µm (BG 1 / BG 2), 40 µm (BG 3)
Housing	Die-cast zinc, Aluminium for G 1 variant
Drain valve	Semi-automatic
Flow rate measurement	At P1 = 6 bar and pressure drop Δp = 1 bar



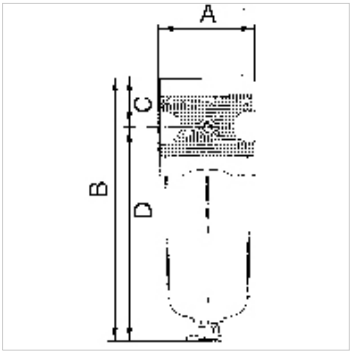

Note

Further information on request

Description

Centrifugal separators with a sintered filter element.

Item

Identification	Thread	Flow rate (L/min)	A (mm)	B	C (mm)	D (mm)	DN	Size
K- 07 25 00 46	G 1/4	2100	47,8	152.1 mm	27,0	125,1	6	1
K- 07 25 00 49	G 3/8	2100	47,8	152.1 mm	27,0	125,1	10	1
K- 07 25 00 52	G 1/2	4000	68,8	181.8 mm	34,5	147,3	15	2
K- 07 25 00 55	G 3/4	4000	68,8	181.8 mm	34,5	147,3	20	2
K- 07 25 00 58	G 1	8000	100,0	305.8 mm	52,0	253,8	25	3

Spare parts

K-HALTERBAUSATZ MULTIFIX	Holder
K-KOPPELPAKET MEHR	Coupling packet
K-KOPPELPAKET SCHMA	Coupling packet
K-METALLBEHAELTER OELER MULTIFIX	Metal tank oiler
K-PC-BEHAELTER FILTER MULTIFIX	Polycarbonate tank filter
K-SCHUTZKORB G	Protective cage
K-FILTERELEMENT	Filter element
K-AUTOMAT ABLASSVENTIL	Automatic drain valve

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.