


# K-NEBELOELER PC-BEHAEALTER MULTIFIX

Oil-mist lubricators with polycarbonate bowl

**HANSA FLEX**

## Properties

<b>Input pressure</b>	Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl)
<b>Media temperature</b>	max. 60 °C
<b>Ambient temperature</b>	Max. 60 °C
<b>Sealant</b>	NBR
<b>Housing</b>	Die-cast zinc, Aluminium for G 1 variant
<b>Dropper</b>	PA (polycarbonate bowl), Zinc-glass-NBR (metal bowl)
<b>Drain valve</b>	Manual
<b>Oil grade</b>	CL 32 acc. to DIN 51517 - ISO VG 32
<b>Flow rate measurement</b>	At P1 = 6 bar and pressure drop $\Delta p = 1$ bar

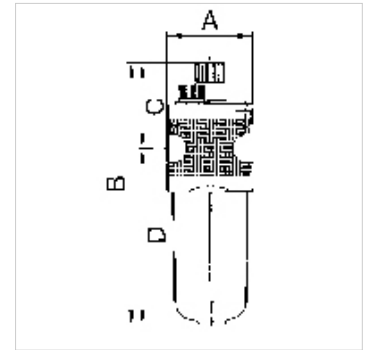

## Note

Further information on request

## Description

Proportional lubricators, oil can be filled under pressure.

Item	Identification	Thread	Flow rate (L/min)	A (mm)	B	C (mm)	D (mm)	DN	Size
	K- 07 25 00 91	G 1/4	1900	47,8	167.8 mm	58,0	109,8	6	1
	K- 07 25 00 94	G 3/8	1900	47,8	167.8 mm	58,0	109,8	10	1
	K- 07 25 00 97	G 1/2	5000	68,8	198.2 mm	66,1	132,1	15	2
	K- 07 25 01 00	G 3/4	5000	68,8	198.2 mm	66,1	132,1	20	2
	K- 07 25 01 03	G 1	18000	100,0	324.3 mm	82,7	241,6	25	3

## Spare parts

<b>K-HALTERBAUSATZ MULTIFIX</b>	Holder
<b>K-KOPPELPAKET MEHR</b>	Coupling packet
<b>K-KOPPELPAKET SCHMA</b>	Coupling packet
<b>K-METALLBEHAELTER OELER MULTIFIX</b>	Metal tank oiler
<b>K-PC-BEHAEALTER FILTER MULTIFIX</b>	Polycarbonate tank filter
<b>K-SCHUTZKORB G</b>	Protective cage
<b>K-TROPFAUFSATZ POLYCARBO 1</b>	Drip attachment polycarbonate
<b>K-TROPFAUFSATZ METALL</b>	Drip attachment metal