# K-NEBELOEL METALLBEHAE S T MULTIFIX


Oil-mist lubricators with metal bowl and sight glass, metal sight dome

HANSA-FLEX

## Properties

| | |
|---|---|
| **Input pressure** | Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl) |
| **Media temperature** | max. 60 °C |
| **Ambient temperature** | Max. 60 °C |
| **Sealant** | NBR |
| **Housing** | Die-cast zinc, Aluminium for G 1 variant |
| **Dropper** | PA (polycarbonate bowl), Zinc-glass-NBR (metal bowl) |
| **Drain valve** | Manual |
| **Oil grade** | CL 32 acc. to DIN 51517 - ISO VG 32 |
| **Flow rate measurement** | At P1 = 6 bar and pressure drop Δp = 1 bar |



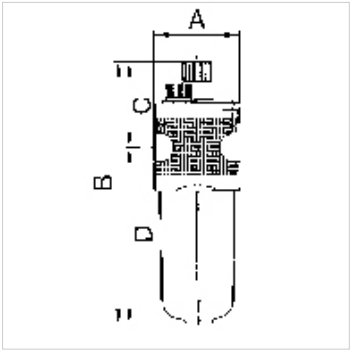


## Note

Further information on request

## Description

Proportional lubricators, oil can be filled under pressure.

## Item

| Identification | Thread | Flow rate (L/min) | A (mm) | B | C (mm) | D (mm) | DN | Size |
|---|---|---|---|---|---|---|---|---|
| **K- 07 25 00 92** | G 1/4 | 1900 | 47,8 | 181.3 mm | 71,3 | 110,0 | 6 | 1 |
| **K- 07 25 00 95** | G 3/8 | 1900 | 47,8 | 181.3 mm | 71,3 | 110,0 | 10 | 1 |
| **K- 07 25 00 98** | G 1/2 | 5000 | 68,8 | 213.0 mm | 79,3 | 133,7 | 15 | 2 |
| **K- 07 25 01 01** | G 3/4 | 5000 | 68,8 | 213.0 mm | 79,3 | 133,7 | 20 | 2 |
| **K- 07 25 01 04** | G 1 | 18000 | 100,0 | 322.9 mm | 82,7 | 240,2 | 25 | 3 |

## Spare parts

| | |
|---|---|
| **K-HALTERBAUSATZ MULTIFIX** | Holder |
| **K-KOPPELPAKET MEHR** | Coupling packet |
| **K-KOPPELPAKET SCHMA** | Coupling packet |
| **K-METALLBEHAELTER OELER MULTIFIX** | Metal tank oiler |
| **K-PC-BEHAELTER FILTER MULTIFIX** | Polycarbonate tank filter |
| **K-SCHUTZKORB G** | Protective cage |
| **K-TROPFAUFSATZ POLYCARBO 1** | Drip attachment polycarbonate |
| **K-TROPFAUFSATZ METALL** | Drip attachment metal |

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*