


K-NEBELOEL METALLBEHAE S T MULTIFIX

Oil-mist lubricators with metal bowl and sight glass, metal sight dome

HANSA FLEX

Properties

| | |
|------------------------------|--|
| Input pressure | Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl) |
| Media temperature | max. 60 °C |
| Ambient temperature | Max. 60 °C |
| Sealant | NBR |
| Housing | Die-cast zinc, Aluminium for G 1 variant |
| Dropper | PA (polycarbonate bowl), Zinc-glass-NBR (metal bowl) |
| Drain valve | Manual |
| Oil grade | CL 32 acc. to DIN 51517 - ISO VG 32 |
| Flow rate measurement | At P1 = 6 bar and pressure drop $\Delta p = 1$ bar |

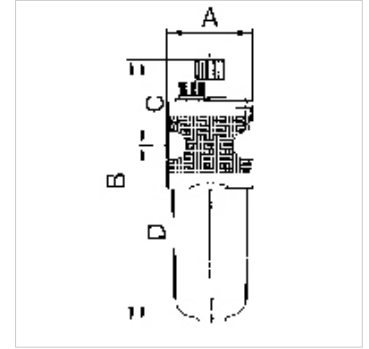

Note

Further information on request

Description

Proportional lubricators, oil can be filled under pressure.

| Item | Identification | Thread | Flow rate (L/min) | A (mm) | B | C (mm) | D (mm) | DN | Size |
|------|----------------|--------|-------------------|--------|----------|--------|--------|----|------|
| | K- 07 25 00 92 | G 1/4 | 1900 | 47,8 | 181.3 mm | 71,3 | 110,0 | 6 | 1 |
| | K- 07 25 00 95 | G 3/8 | 1900 | 47,8 | 181.3 mm | 71,3 | 110,0 | 10 | 1 |
| | K- 07 25 00 98 | G 1/2 | 5000 | 68,8 | 213.0 mm | 79,3 | 133,7 | 15 | 2 |
| | K- 07 25 01 01 | G 3/4 | 5000 | 68,8 | 213.0 mm | 79,3 | 133,7 | 20 | 2 |
| | K- 07 25 01 04 | G 1 | 18000 | 100,0 | 322.9 mm | 82,7 | 240,2 | 25 | 3 |

Spare parts

| | |
|----------------------------------|-------------------------------|
| K-HALTERBAUSATZ MULTIFIX | Holder |
| K-KOPPELPAKET MEHR | Coupling packet |
| K-KOPPELPAKET SCHMA | Coupling packet |
| K-METALLBEHAELTER OELER MULTIFIX | Metal tank oiler |
| K-PC-BEHAELTER FILTER MULTIFIX | Polycarbonate tank filter |
| K-SCHUTZKORB G | Protective cage |
| K-TROPFAUFSATZ POLYCARBO 1 | Drip attachment polycarbonate |
| K-TROPFAUFSATZ METALL | Drip attachment metal |