


# K-PRAEZI DRUCKREGLER MULTIFIX

Precision pressure regulators

**HANSA FLEX**

## Properties

Input pressure	Max. 16 bar
Media temperature	max. 60 °C
Ambient temperature	Max. 60 °C
Sealant	NBR
Spring bonnet	POM-brass
Housing	Die-cast zinc
Internal air consumption	2.6 l/min, depending on secondary pressure
Flow rate measurement	At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p$ = 1 bar

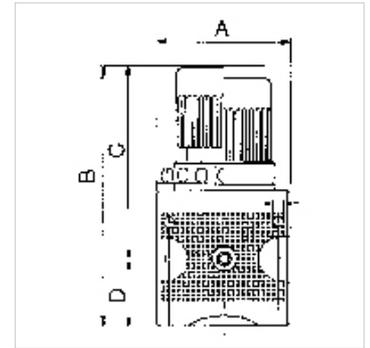

## Note

Further information on request

## Description

Diaphragm pressure regulators, independent of inlet pressure, with self-relieving design and very high flow rate. The pressure setting can be locked by pushing the button down.

## Ordering information

Lockable precision pressure regulators available on request

Item	Identification	Thread	Control range	Flow rate (L/min)	A (mm)	B	C (mm)	D (mm)	DN	Size
	K- 07 25 00 37	G 1/4	0.1 - 3 bar	1500	47,8	94.8 mm	67,0	27,8	6	1
	K- 07 25 00 38	G 1/4	0.2 - 6 bar	1500	47,8	94.8 mm	67,0	27,8	6	1
	K- 07 25 00 36	G 1/4	0.5 - 10 bar	1500	47,8	94.8 mm	67,0	27,8	6	1
	K- 07 25 00 40	G 1/2	0.1 - 3 bar	6000	68,8	134.1 mm	99,0	35,1	15	2
	K- 07 25 00 41	G 1/2	0.2 - 6 bar	6000	68,8	134.1 mm	99,0	35,1	15	2
	K- 07 25 00 39	G 1/2	0.5 - 10 bar	6000	68,8	134.1 mm	99,0	35,1	15	2

## Spare parts

K-HALTERBAUSATZ	Holder
K-SCHALTTAFELMUTTER	Nut
K-HALTERBAUSATZ MULTIFIX	Holder
K-KOPPELPAKET MEHR	Coupling packet
K-KOPPELPAKET SCHMA	Coupling packet
K-VERSCHLEI-SATZ	Set of wearing parts