K-SCHALTVENTILE 3/2 MULTIFIX


On-off valves (3/2-way valves)

HANSA FLEX

Properties

Input pressure	Min. 2 bar, max. 10 bar
Media temperature	max. 60 °C
Ambient temperature	Max. 60 °C
Electrical connection	Device plug PG 9, type B, EN 175301-803
Protection IP	IP 65 (P 54) acc. to DIN 40050
cyclic duration relative	100 %
Vent port	Silencer G 1/4
Sealant	NBR
Housing	Die-cast zinc
Flow rate measurement	At P1 = 6 bar and pressure drop Δp = 1 bar



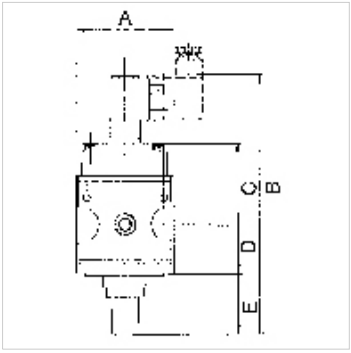

Note

Further information on request

Description

Pneumatic systems or parts of systems can be switched on and off by means of anelectrical signal. When they are switched off, the system is relieved at the same time.

Ordering information

On-off valves are also available in a pneumatically operated version. Please ask for more information.

Item

Identification	Thread	Flow rate (L/min)	Solenoid	A (mm)	B	C (mm)	D (mm)	E (mm)	Size
K- 07 25 11 65	G 1/4	900	24 V AC, 50 Hz	47,8	138.7 mm	43,7	26,0	17,5	1
K- 07 25 11 66	G 1/4	900	230 V AC, 50 Hz	47,8	138.7 mm	43,7	26,0	17,5	1
K- 07 25 11 67	G 1/4	900	110 V AC, 50 Hz	47,8	138.7 mm	43,7	26,0	17,5	1
K- 07 25 11 68	G 1/4	900	24 V DC	47,8	138.7 mm	43,7	26,0	17,5	1
K- 07 25 11 69	G 1/2	4000	24 V AC, 50 Hz / 12 V DC	68,8	185.0 mm	56,2	33,5	44,1	2
K- 07 25 11 70	G 1/2	4000	230 V AC, 50 Hz	68,8	185.0 mm	56,2	33,5	44,1	2
K- 07 25 11 71	G 1/2	4000	110 V AC, 50 Hz	68,8	185.0 mm	56,2	33,5	44,1	2
K- 07 25 11 72	G 1/2	4000	24 V DC	68,8	185.0 mm	56,2	33,5	44,1	2

Accessories

K-SCHALLDAE SINTERBR GE MS1	Silencers, sintered bronze, with brass hexagon nut and brass thread

Spare parts

K-KOPPELPAKET MEHR	Coupling packet
K-KOPPELPAKET SCHMA	Coupling packet
K-GERAETESTECKER	Coupling socket
K-HALTERBAUSATZ MULTIFIX	Holder
K-MAGNETSPULE MULTIFIX	Solenoid
K-WV 3/2 VORSTEU HAND MULTIFIX	3/2-way valve

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.